


AVN66G12G | N-type Bifacial -

Glass to Glass | 132 Cells | 720 Watt | >23.18% Efficiency

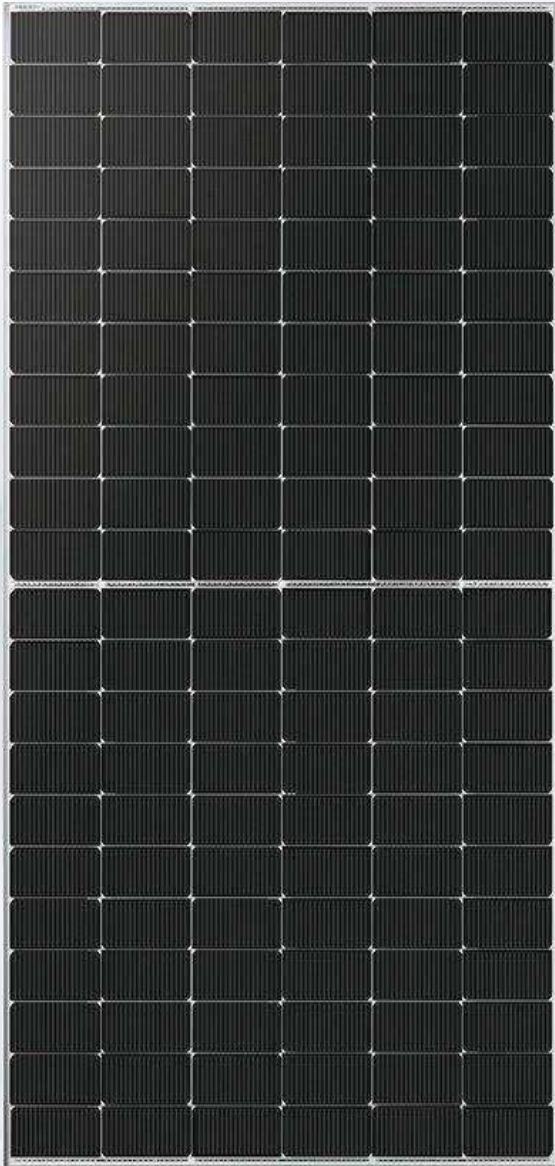

"N" TOPCON TECHNOLOGY

700 - 720 WATT



Up to 30% Additional Power Generation Gain
Additional power gain from rear side depending on albedo



LOW LID (Light Induced Degradation)
TOPCon cells have low LID, because of its N-Type silicon substrate



Lower LCOE
High bifaciality, high power output, saving BOS cost



Better Weak Illumination Response
Wide spectral response, higher power output even under low-light settings like smog or cloudy days



Better Temperature Coefficient
TOPCon cell has a better temperature coefficient which help in better performance in hot climate



Wider Applicability
Vertical installation, snowfield, high-humid area

720 W
MAXIMUM
POWER
OUTPUT

0~+5 W
POWER
OUTPUT
TOLERANCE

18 BB
MULTI
BUSBAR

Key Features

- Fully automatic facility with cutting-edge technology
- Guaranteed positive tolerance to ensure power output reliability
- Split junction boxes reduce module temperature resulting increased module reliability

Quality & Reliability

- IP68 rated junction box for long-term weather endurance
- Made with high-graded raw material to achieve Quality, Durability, Efficiency, and through output
- 12 Years Workmanship & 30 Years Linear Performance Warranty

Disclaimer: As part of continuous innovation and R&D improvements, the specifications and key features outlined in this datasheet may be subject to minor changes and are not guaranteed. V-Guard reserves the right to update the information provided at any time without prior notice. To ensure accuracy, please always refer to the latest version of the datasheet, which will be considered a part of the binding contract governing all transactions related to the purchase and sale of the products described herein.

TECHNICAL DATA

AVN66G12G | N-type Bifacial - Glass to Glass | 132 Cells | 720 Watt | >23.18% Efficiency

Electrical Parameter at STC

Module Type	AVN66G12G				
Capacity rating – Pmax (Wp*)	700	705	710	715	720
Rated voltage - Vmp(V)	40.5	40.7	40.9	41.1	41.3
Rated current - Imp(A)	17.29	17.33	17.36	17.4	17.43
Open circuit voltage - Voc(V)	48.2	48.4	48.6	48.8	49
Short circuit current - Isc(A)	18.32	18.36	18.4	18.44	18.48
Module efficiency (%)	22.53%	22.70%	22.86%	23.02%	23.18%

*STC: Irradiance 1000W/m², Cell Temperature 25°C, Air Mass AM1.5. *Measuring tolerance: ±3%.

Electrical Parameter at NOCT

Capacity rating – Pmax (Wp*)	534	538	542	546	550
Rated voltage - Vmp(V)	37.8	38	38.2	38.4	38.6
Rated current - Imp(A)	14.14	14.16	14.19	14.22	14.25
Open circuit voltage - Voc(V)	45.7	45.9	46.1	46.3	46.5
Short circuit current - Isc(A)	14.8	14.84	14.88	14.92	14.96

*NOCT: Irradiance at 800 W/m², Ambient Temperature 20°C, Wind Speed 1 m/s. *Power Bifaciality: 80±5%

Mechanical Specification

Specification	Details
Solar cells	N type TOPCon, MBB 132 Cell
Encapsulation	POE/EPE/EVA
Back glass	2.0mm, Semi Tempered Glass
Front glass	2.0mm, Anti-Reflection Coated
Frame	Anodized Aluminum Alloy
Dimensions	(L) 2384 mm x (W) 1303 mm x (H) 35mm
Weight	38 kg
J-box	IP 68 certified, 3 diodes
Cable	Solar cable 4 mm ² , length 300 mm / customized
Connectors	MC4-compatible connectors

Operating Properties

Temperature range	-40°C to + 85°C
Maximum system voltage	1500 VDC
Power Tolerance	0 ~ +5 W
Bifaciality factor (As per Lab)	80± 5%

Temperature Coefficient

NOCT(Nominal Operating Cell Temperature)	45°C (±2°C)
Temperature Coefficient of Pmax	- 0.30%/°C
Temperature Coefficient of Voc	- 0.25%/°C
Temperature Coefficient of Isc	0.04%/°C

Certificates[†]


BIS | IEC 61730 | IEC 61215 | UL 61730 | IEC 62804(PID) | IEC 61701 (Salt Mist) | IEC 61716(Ammonia) IEC 62782 | LID, LeTID | IEC 60068(Sand & Dust) | CEC | CE

† Few Certifications in process


Packing Configuration

Container	40'HQ
Modules per Pallet	31
Pallets per Container	20
Modules per Container	620


Dimensions in mm

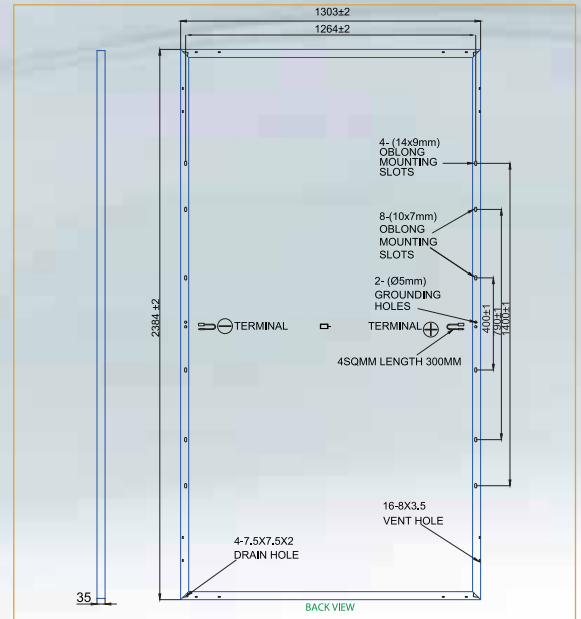

Performance Warranty

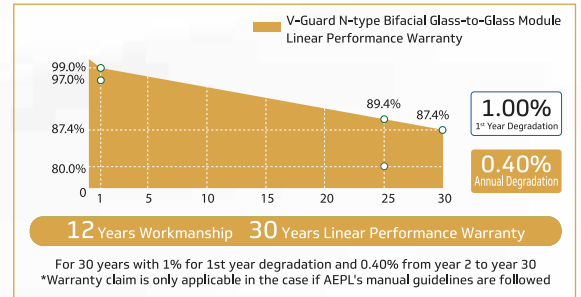

IV-Curve

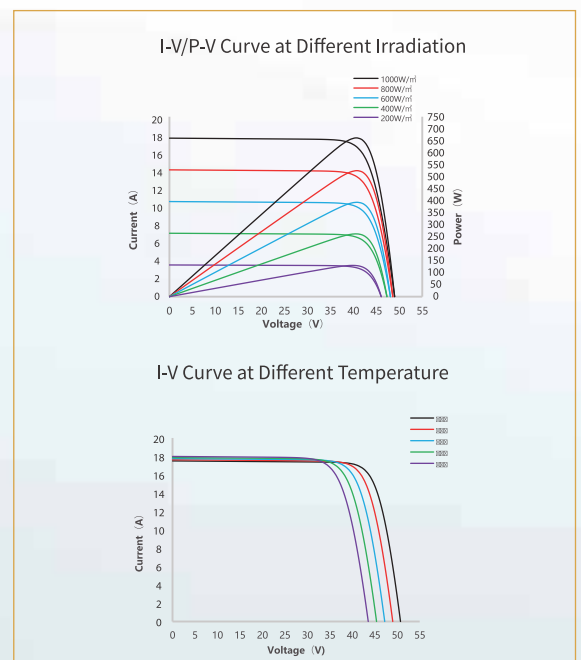

Contact us: Sales Queries: 0484-2005000, 4335000 | Email: customercare@vguard.in
V-Guard Care: 0120-4850100 | 1860 180 3000

The Specification and key features contained in this datasheet may deviate slightly from our actual products due to the on-going innovation & product enhancement, V-Guard Industries Limited reserves the right to make necessary adjustment to the information described herein at any time without further notice.